


Defrost Controller

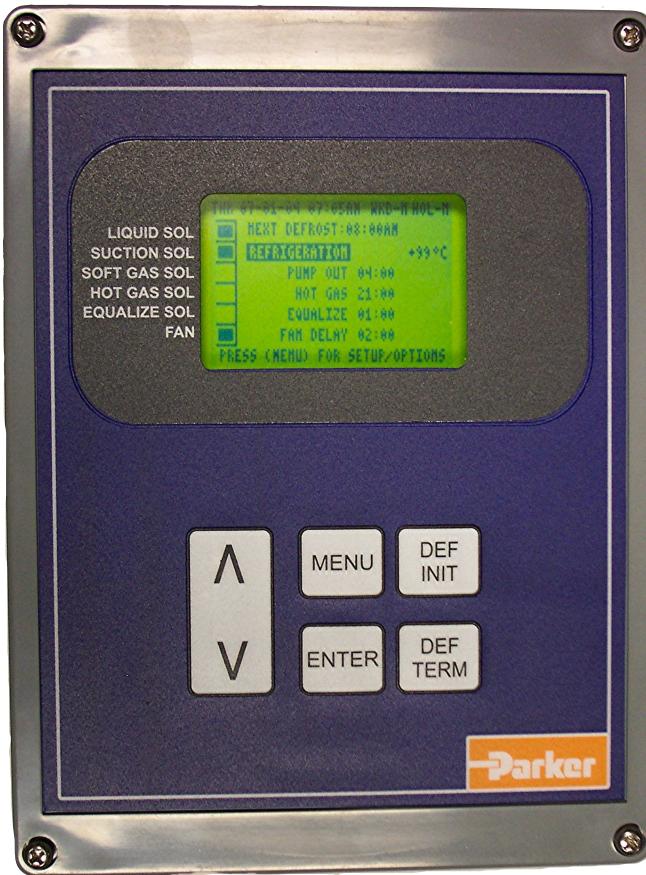

For industrial and commercial systems.
Suitable for hot gas, water and electric
defrost applications.

Features:

- Selectable defrost initiation modes:
 - 24 hour/constant interval
 - constant interval
 - time of day
 - remote contact
- Selectable defrost termination modes:
 - time
 - temperature with time override
 - remote contact with time override
- Manual defrost initiation/termination/step through
- Settings stored indefinitely in nonvolatile memory
- 30-day time/date/day retention after power failure (resetting not required)
- Weekend/holiday energy-saving schedules
- Six (6) SPDT relay outputs
- Two (2) digital inputs
- One analog input
- One analog output
- RS485 communication port
- Operating temperature range 32°F to 120°F (0°C to 50°C)
- Watertight NEMA 4 enclosure
- Submitted for UL/CSA/CE approval

Refrigerating Specialties
parker.com/rs

2445 South 25th Avenue
Broadview, Illinois 60155-3858
(708) 681-6300 Fax: (708) 681-6306
(800) 506-4261

Parker
anything possible